




Your Innovative Edge



## Unihammer - Replaceable Face Hammer

One piece head and handle cast of aircraft aluminum alloy to provide stability through striking motion. Aluminum alloy provides resistance to sparking. Tough vinyl coating provides improved safety and allows user to grip handle firmly regardless of oil or perspiration.

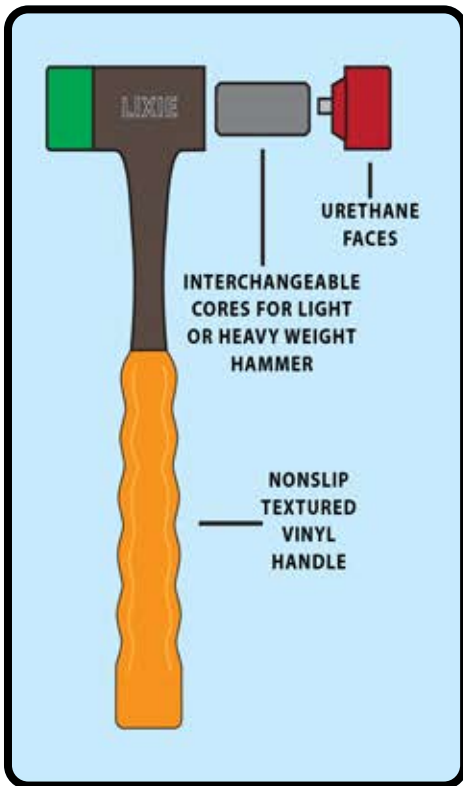

All Unihammers come with (M) Medium and (T) Tough Urethane faces preinstalled. If you require different head hardness please order the appropriate faces separately.

As one of the oldest striking tool manufacturers remaining in North America, Lixie continues their tradition of quality, durability, innovation, design and superb manufacture at a fair price. All Lixie products are backed by a quality guarantee.

### *Unihammer Configurations*

Model	Face Dia.	Head Length	Overall Length	Weight (Ounces)
U 150 L - MT	1-1/2"	4-1/8"	11-1/2"	16
U 150 H - MT	1-1/2"	4-1/8"	11-1/2"	22

### *Replacement Urethane Face Configurations*



(XXX) (X)


Head Sizes  
 (150) - 1.500" Striking Face  
 (200) - 2.000" Striking Face  
 (250) - 2.500" Striking Face

Face Hardness  
 (M) - Medium (Green)  
 (T) - Tough (Red)  
 (H) - Hard (Black)

Lixie screw type replaceable urethane faces are included on all Lixie Dead Blow and Unihammers. They are impervious to oils and most solvents, these solid polyurethane faces have high impact absorption, yet will not mar,peen, or deform the struck surface. Each of the hardnesses are color coded for convenience.

# INDUSTRIAL MALLET & HAMMERS

For over 70 years, skilled artisans and crafts people have turned to Lixie for the world's finest industrial and commercial striking tools.

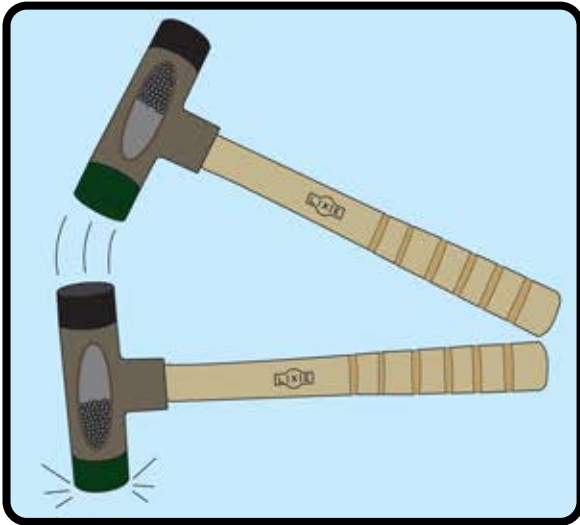

## Dead Blow Mallets with Hickory Handle

**Dead Blow:** Dead blow mallets and sledges are constructed from malleable iron or spark resistant hi-tensile aluminum. Hollow head castings are partially filled with steel shot that moves forward toward struck surface on impact, dampening rebound and insuring optimal blow transfer

### *Dead Blow Configurations*




(200) (H) - MH

Head Sizes  
 (150) - 1.500" Striking Face  
 (200) - 2.000" Striking Face  
 (250) - 2.500" Striking Face

Head Casting Material  
 (H) - Malleable Iron  
 (L) - Aluminum

All Dead Blow hammers come with (M) Medium and (H) Hard Urethane faces preinstalled. If you require different head hardness please order the appropriate faces seperately.

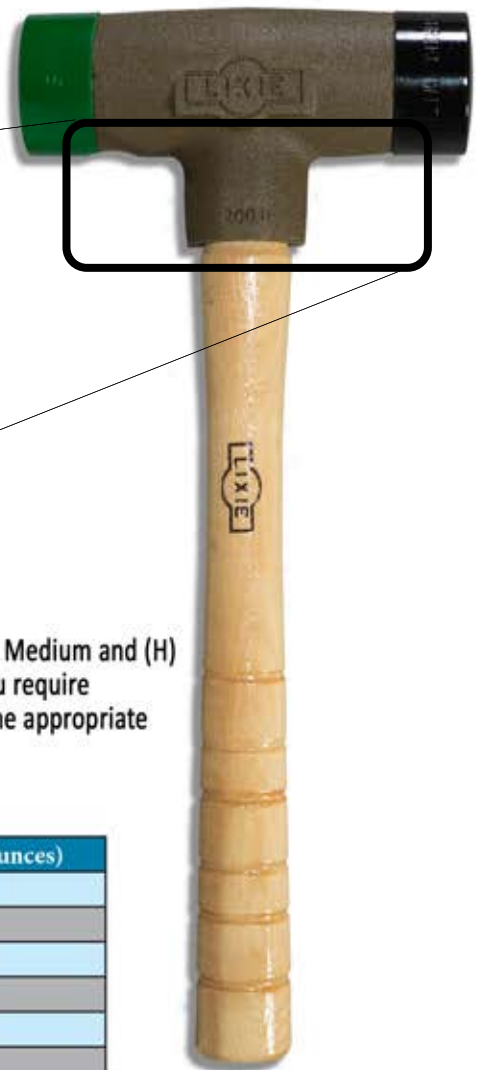

Model	Head Length	Overall Length	Weight (Ounces)
150 H - MH	5-1/4"	13"	30
150 L - MH	5-1/4"	13"	20
200 H - MH	6-1/4"	15"	56
200 L - MH	6-1/4"	15"	38
250 H - MH	7-1/4"	17"	100
250 L - MH	7-1/4"	17"	66



## Canada

1875 Blackacre Drive

Windsor, Ontario N0R 1L0

Tel. (519) 737 6743 (800) 265 4885

## USA

17197 Newhope Street, Unit I

Fountain Valley, California 92708-4228

Tel. (714) 751 1615 (800) 421 3993

1026 National Parkway

Schaumburg, Illinois 60173-4519

Tel. (847) 885 6007 (888) 766 8006

## Asia

Hong Kong



**Your Innovative Edge**

[sales@dmscomponents.com](mailto:sales@dmscomponents.com)

<http://www.dmscomponents.com>

Tel. (519) 737-6743 (800) 265-4885