

U COUPLINGS & T-GIBS




U COUPLINGS

Material: H-13 Steel
Hardness 38-42 RC

Enquire about Custom Unilifter Blades

U-COUPPLINGS - INCH

SERIES	ITEM NO.	CW	CL	CH	RC	R
0.250	ULCM50	0.500	0.437	0.625	0.125	0.250
0.500	ULCU87	0.875	0.750	0.875	0.187	0.406
1.000	ULCX175	1.750	1.500	1.656	0.125	0.875

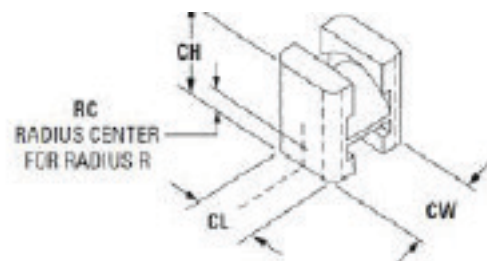


U-COUPPLINGS - METRIC Dimensions in mm

SERIES	ITEM NO.	CW	CL	CH	RC	R
10	ULCMM22	22.00	18.00	25.00	6.00	10

T-GIBS

Material: H-13 Steel
Hardness 38-42 RC



T-GIBS - INCH Dimensions in mm

SERIES	TW + .000 - .001	TH + .010 - .000	TD* + .010 - .000	TR	SHCS	ITEM NUMBER	TS	TL + .000 - .010	TRAVEL ALLOWED
0.250	0.500	0.500	0.344	0.093	#10-32x1"	ULGM31	CL	0.750	5/16
						ULGM100	0.5	1.500	1"
0.500	0.875	0.468	0.219	0.187	1/4-20x3/4	ULGU25	CL	1.000	1/4
						ULGU50	0.375	1.250	1/2
						ULGU100	0.625	1.750	1"
						ULGU150	0.75	2.250	1-1/2
1.000	1.750	0.615	0.250	0.312	3/8-16x1 1/4	ULG×50	0.625	2.000	1/2
						ULG×100	0.875	2.500	1"
						ULG×250	1.375	4.000	2 1/2

T-GIBS - METRIC Dimensions in mm

SERIES	TW + .000 - .025	TH + .25 - .00	TD* + .25 - .00	TR	SHCS	ITEM NUMBER	TS	TL + .00 - .25	TRAVEL ALLOWED
10	22	13	6.00	5	M5 X 20	ULGMM10	10	33	10
						ULGMM30	15	52	30

*NOTE: Thickness TD is provided with an additional .010" (or .25mm) for final adjustment