


TOP LOCKS



- > Male half: O-6 steel (58-60 Rc)
- > Black Oxide Finish
- > Female half: S-7 steel (54-56 Rc)
- > Titanium Nitrided (80 Rc)
- > Supplied with socket head cap screws.
- > Sold in sets only.

Catalog Number	A +.0000 -.0004	D +.000 -.002	C +.000 -.002	B +.000 -.002	E +.010 -.010	F .0001/.0003 Clearance per side	G1 +.010 -.010	G2 +.010 -.010	R	SHCS	
										MALE	FEMALE
TL50X100	1.000	0.500	0.500	0.375	0.300	0.375	0.25	0.688	0.188	#6-32 X 1/2	#6-32 X 5/8
TL62X125	1.250	0.625	0.625	0.500	0.410	0.438	0.312	0.875	1/4	#6-32 X 5/8	#6-32 X 3/4
TL75X125	1.250	0.750	0.625	0.500	0.380	0.438	0.375	0.875	1/4	#8-32 X 5/8	#8-32 X 3/4
TL87X150	1.500	0.875	0.875	0.750	0.570	0.500	0.437	1.000	1/4	#8-32 x 7/8	#8-32 x 1
TL100X150	1.500	1.000	0.875	0.375	0.570	0.500	0.500	1.000	1/4	#10-32 X 1/2	#10-32 X 1
TL100X200	2.000	1.000	1.125	0.750	0.750	0.750	0.500	1.375	3/8	#10-32 x 7/8	#10-32 x 1-1/8
TL112X200	2.000	1.125	0.875	0.625	0.500	0.750	0.563	1.375	3/8	1/4-20 X 3/4	1/4-20 X 1
TL112X300	3.000	1.125	1.500	0.750	0.870	1.125	0.563	2.250	1/2	1/4-20 X 7/8	1/4-20 X 1-5/8
TL150X250	2.500	1.500	1.375	0.625	0.850	1.000	0.750	1.750	3/8	1/4-20 X 3/4	1/4-20 X 1-1/2
TL175X300	3.000	1.750	1.250	0.875	0.750	1.125	0.875	2.250	1/2	5/16-18 X 1	5/16-18 X 1-1/4
TL200X350	3.500	2.000	1.750	0.750	1.07	1.500	1.000	2.500	1/2	3/8-16 X 7/8	3/8-16 X 2

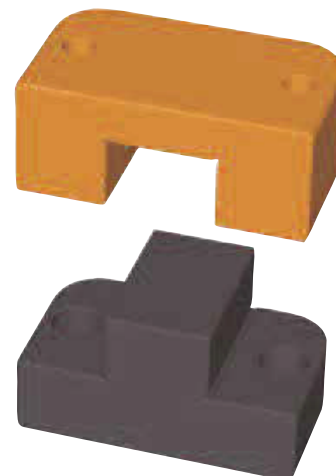