


SLIDE LATCH


HIGH HARDNESS




SLK-8-HH Rated to carry a weight up to 8 pounds. 100% interchangeable with SLK-8A.

INSTALLATION – LOCK


OPTION A MACHINED INTO SLIDE




OPTION B LOCK INSERT




INSTALLATION – BODY






DESIGN GUIDELINES

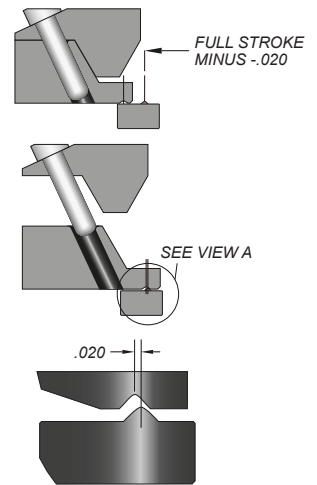

NOTE: Set angle pin to release .020 from full stroke. Striker will snap to full stroke to assure re-entry clearance of angle pin.

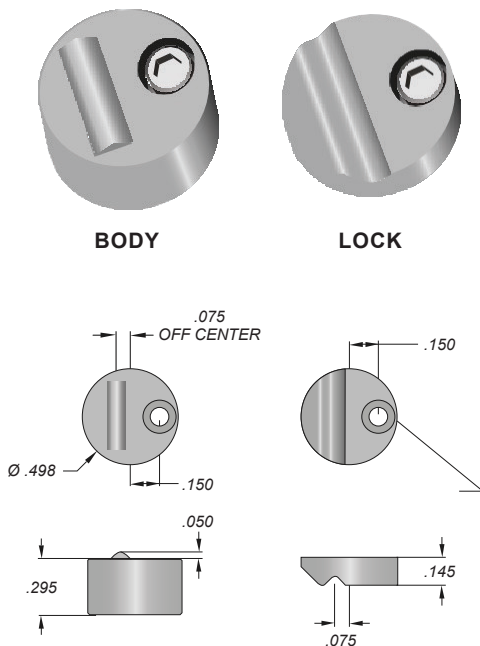


SLK-25-HH Rated to carry a weight up to 25 pounds. 100% interchangeable with SLK-25A.

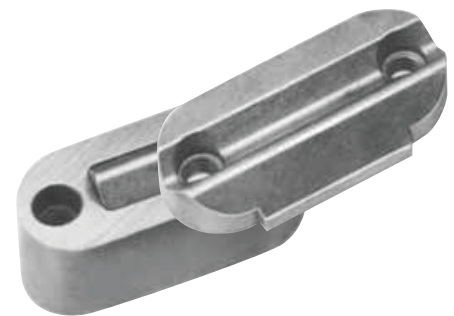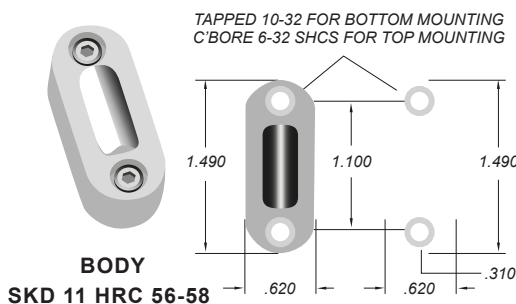


INSTALLATION – LOCK



OPTION A MACHINED INTO SLIDE

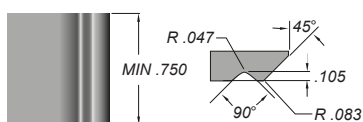


OPTION B LOCK INSERT

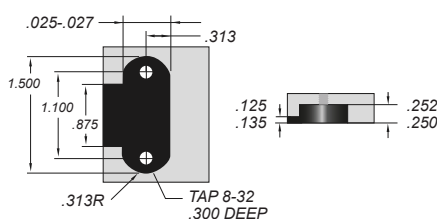

INSTALLATION – BODY



DESIGN GUIDELINES

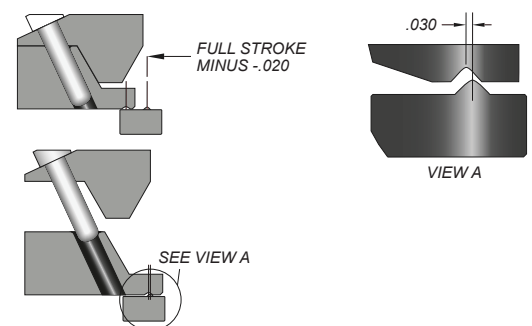

NOTE: Set angle pin to release .020 from full stroke. Striker will snap to full stroke to assure re-entry clearance of angle pin.