


SWIVEL WATER JUMPERS

- Can be fully recessed to prevent accidental disconnect or damage.
- Swivel body allows installation in tight spaces.
- Eliminate crimped hoses and setup errors.
- Supplied with Viton O-Ring seals.
- All brass construction.
- Hex key installation.
- Custom length Jumpers can be quoted.



Heavy duty hex key socket allows maximum torque and positive removal.

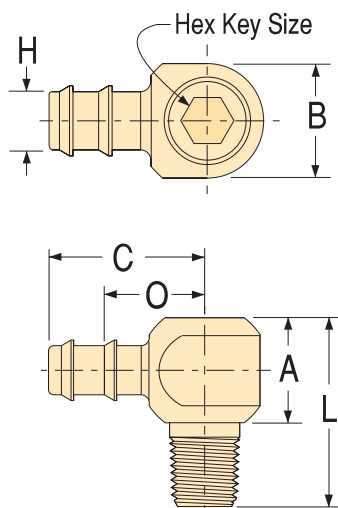

Threads can be adjusted to specific lengths.

CATALOG NUMBER	PIPE SIZE (NPT)	H HOSE I.D.	HEX KEY SIZE	L	A	C	O	B	MIN. SLOT WIDTH	MIN. SLOT DEPTH
WJ18-S	1/8	5/16	3/16	1-3/16	11/16	1"	5/8	0.660	11/16	1"
WJ18-M	1/8	5/16	3/16	2"	11/16	1"	5/8	0.660	11/16	1"
WJ18-L	1/8	5/16	3/16	3-1/2	11/16	1"	5/8	0.660	11/16	1"
WJ14-S	1/4	3/8	1/4	1-7/16	13/16	1-3/16	25/32	0.840	7/8	1-3/16
WJ14-M	1/4	3/8	1/4	2-3/8	13/16	1-3/16	25/32	0.840	7/8	1-3/16
WJ14-L	1/4	3/8	1/4	3-7/8	13/16	1-3/16	25/32	0.840	7/8	1-3/16
WJ38-S	3/8	1/2	5/16	1-5/8	1"	1-3/8	15/16	0.980	1"	1-3/8
WJ38-M	3/8	1/2	5/16	2-5/8	1"	1-3/8	15/16	0.980	1"	1-3/8
WJ38-L	3/8	1/2	5/16	4-1/8	1"	1-3/8	15/16	0.980	1"	1-3/8
WJ50-S	1/2	3/4	3/8	2"	1-1/8	1-1/2	1-1/8	1.235	1-1/4	1-9/16
WJ50-M	1/2	3/4	3/8	3"	1-1/8	1-1/2	1-1/8	1.235	1-1/4	1-9/16
WJ50-L	1/2	3/4	3/8	4-1/2	1-1/8	1-1/2	1-1/8	1.235	1-1/4	1-9/16

Flow Data

