


EJECTOR BLADES

THROUGH HARD — METRIC

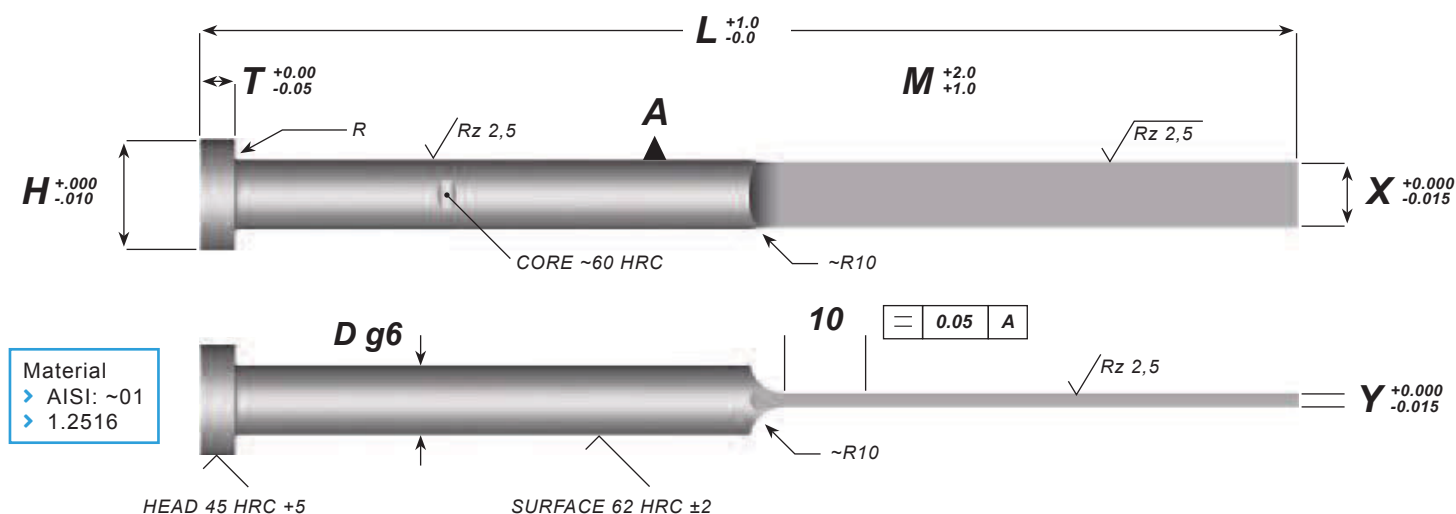

Nominal Size		g6	
Over	To	Tolerance (mm)	
3mm	6mm	-,004	-,012
6mm	10mm	-,005	-,014
10mm	18mm	-,006	-,017

X	Y	No.	L									D	H	T	R
			63	80	100	125	160	200	250	315	400				
			M=32	M=40	M=50	M=63	M=80	M=100	M=125	M=160	M=200				
3,5	0,8	B03508	063	080	100	125	160					4,0	8,0	3,0	0,3
	1,0	B03510	063	080	100	125	160	200	250						
	1,2	B03512		080	100	125	160	200							
3,8	0,8	B03808	063	080	100	125	160					4,2	8,0	3,0	0,3
	1,0	B03810	063	080	100	125	160								
	1,2	B03812		080	100	125	160	200							
4,5	1,0	B04510	063	080	100	125	160	200				5,0	10,0	3,0	0,3
	1,2	B04512		080	100	125	160	200							
	1,5	B04515		080	100	125	160	200							
5,5	1,0	B05510		080	100	125	160	200				6,0	12,0	5,0	0,5
	1,2	B05512		080	100	125	160	200	250						
	1,5	B05515		080	100	125	160	200	250						
	2,0	B05520		080	100	125	160	200	250						
7,5	1,0	B07510				125	160					8,0	14,0	5,0	0,5
	1,2	B07512			100	125	160	200	250						
	1,5	B07515			100	125	160	200	250	315					
	2,0	B07520			100	125	160	200	250	315					
9,5	1,2	B05512					160	200				10,0	16,0	5,0	0,5
	1,5	B09515					160	200	250	315	400				
	2,0	B09520					160	200	250	315	400				
11,5	2,0	B11520						200	250	315	400	12,0	18,0	7,0	0,8
	2,5	B11525						200	250	315	400				
15,5	2,0	B15520						200	250	315	400	16,0	22,0	7,0	0,8
	2,5	B15525						200	250	315	400				